

96012477 CHAMPION 2K MHN-LA P WI

Cable	2000W HIT-DE PHL	IK08	IP66			
-------	------------------	------	------	---	---	---


Champion

A high performance 0° tilt asymmetrical floodlight with IP66 optical compartment, SC1 class. Unpainted die-cast aluminium body with Flat Glass enclosure. Luminaire fixed by single bolt through Ø22mm central hole, or twins bolts through Ø15mm holes at 100mm centres. asymmetrical floodlighting distribution with a aluminium - bright anodised reflector side flanges in brilliant. Floodlight suitable for a 2000W HIT-DE PHL lamp. Ideal for sports field and stadium lighting. Floodlight supplied without gear but with ignitor (please order the gear separately).


Dimensions: 598 x 720 x 448 mm
Weight: 21.3 kg



TLG_CHMP_P_PR4.jpg

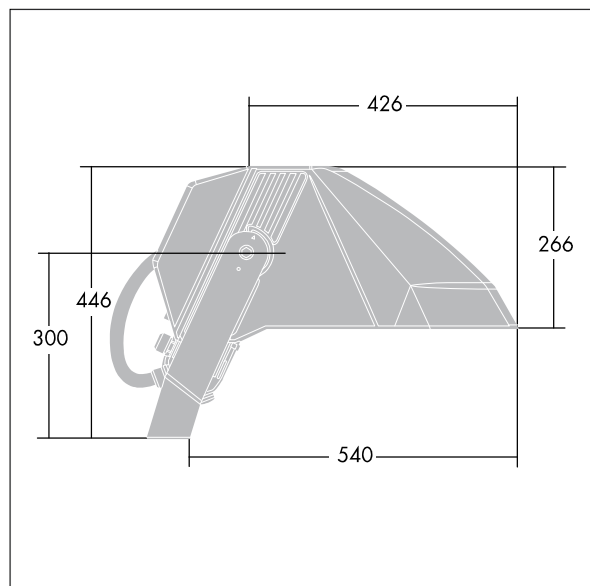


TLG_CHMP_M_SV1.wmf

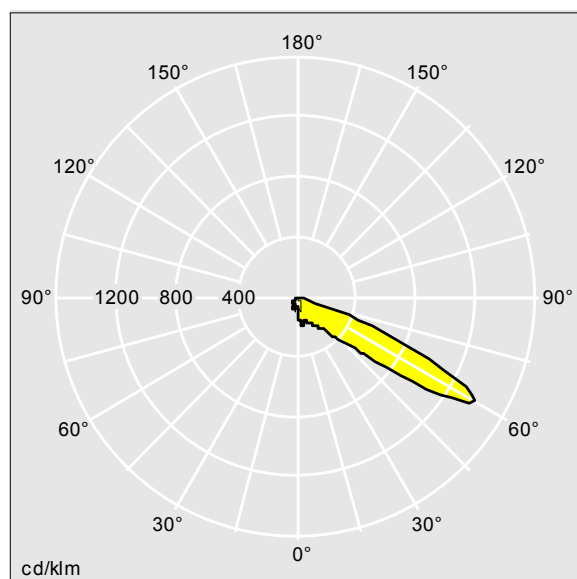

TLG_LA_CHPLA2.ltd

Lamp position: V2
Lamp: HIT-DE PHL 2000W
LOR: 0,71 ULOR: 0,00 DLOR: 0,71

96012477 CHAMPION 2K MHN-LA P WI

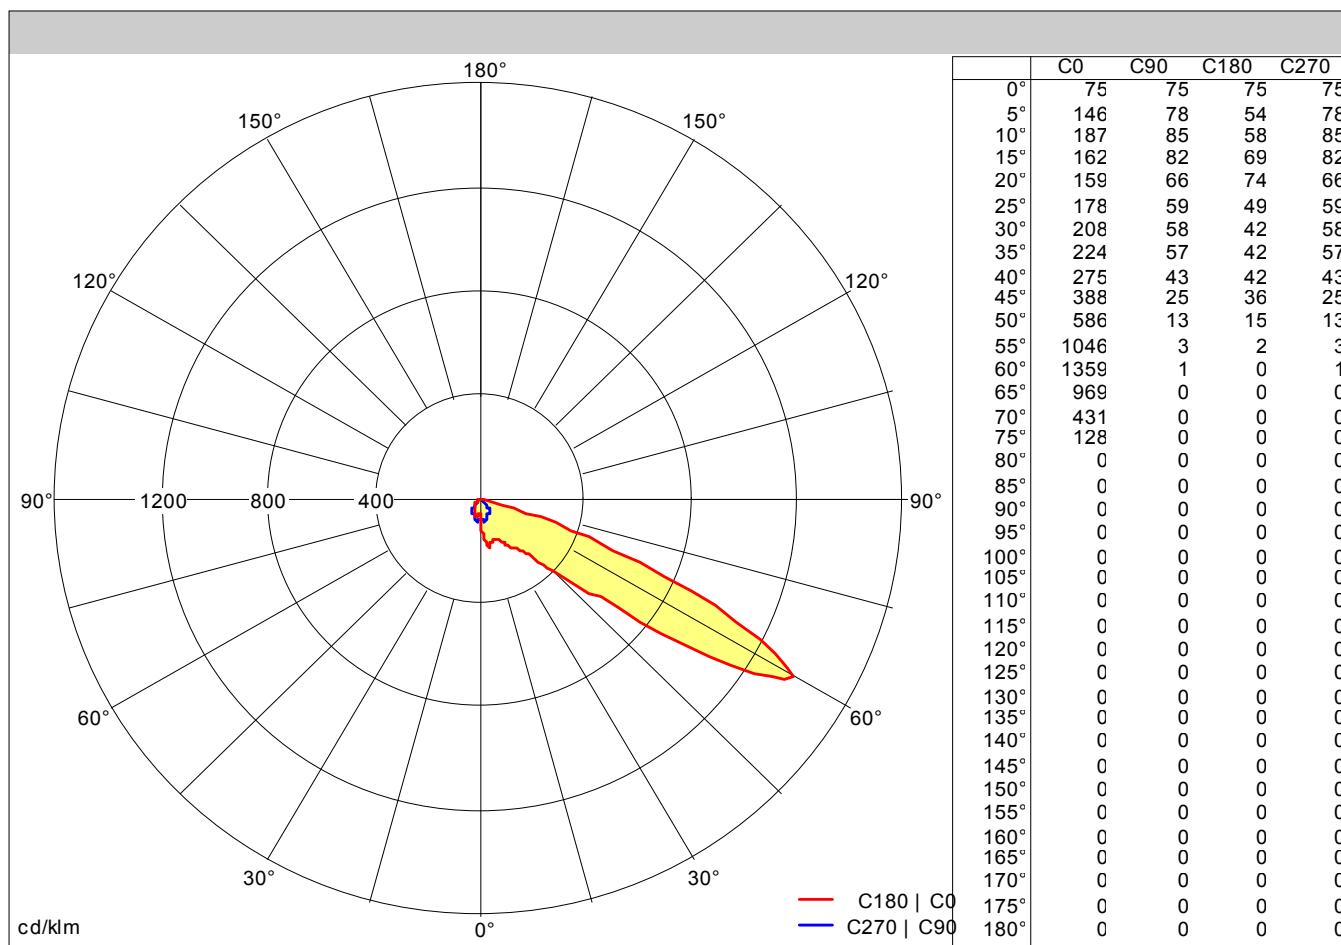

Light output ratio	
LOR	71 %
ULOR	0 %
DLOR	71 %
FFR	0.00 (0:100°)
BLF	1.00

Glare Evaluation	
X = 4 H, Y = 8 H	S = 1.00 H
Reflection factors	70/50/20
UGR transversal	>28
UGR axial	>28

Classification	
LiTG	A20
LG7	
BZ	
UTE	0.71 I
Flux Codes	171 438 702 708 708

Utilization Factors									
Room Reflectance Ceiling/Walls/Floor	0.75	1.00	1.25	1.50	Room Index 2.00	2.50	3.00	4.00	5.00
70 / 50 / 20									
70 / 30 / 20									
70 / 10 / 20									
50 / 50 / 20									
50 / 30 / 20									
50 / 10 / 20									
30 / 50 / 20									
30 / 30 / 20									
30 / 10 / 20									
0 / 0 / 0									
According to CIBSE Technical Memorandum No. 5 1980						SHR Nom =	NA		
						SHR Max =	NA		
						SHR Max TR =	NA		

Photometric data file: TLG_LA_CHPLA2.lgt