


GXLH

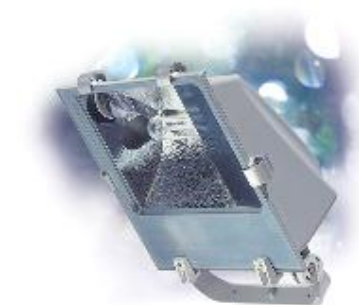

Features

- Modern, high performance floodlight
- Ideal for sports ground installations
- Graduated goniometer allows for accurate aiming angles
- Symmetric reflector as standard
- IP65
- Maximum projected area = 0.16m²

Construction

- Die cast aluminium housing finished in grey RAL 9006
- Extruded anodized aluminium closing clips with stainless steel spring
- Stainless steel external screws
- IP68 M20 x 1.5 anti-tearing cable gland
- Hinged toughened glass
- Supplied with lamp and gear

To specify / order

Die cast, high performance floodlight for use with high wattage discharge lamps as per Tamlite 'GXLH' range



High performance large area floodlight - Symmetric reflector

Cat No	Lamp		Dimensions			
			A	B	C	Weight (kg)
GXLH100S	1 x 100W SON/T		430	545	215	9.20
GXLH150S	1 x 150W SON/T		430	545	215	9.80
GXLH250HPI	1 x 250W HPI/T		430	545	215	9.30
GXLH250M	1 x 250W MBF/U		430	545	215	9.60
GXLH250S	1 x 250W SON/T		430	545	215	11.10
GXLH400HPI	1 x 400W HPI/T		430	545	215	10.80
GXLH400S	1 x 400W SON/T		430	545	215	12.40

Accessories

Suffix	Description
GXLHWG	Wire guard
GXLHHOOD	Light hood

Options

Suffix	Description
ASY	Asymmetric reflector
PC	Photocell
C	Circular reflector (special order only)



TAMLITE LIGHTING TECHNICAL DEPARTMENT
TEL 01952 292441 Fax 01952 292155
e-mail technical@tamlite.co.uk

lighting for
a living