

HIGH BAY



Features


- Large area illumination with symmetric distribution
- Plug in removable gear tray accessed via door on end of gear compartment

Construction

- Steel body and gear housing finished in white
- Detachable high quality spun aluminium reflector
- Triple pole mains terminal block
- Supplied with lamp and gear

To specify / order

Steel high bay body with plug-in gear tray, reflector and elliptical discharge lamp as per Tamlite 'HI' range

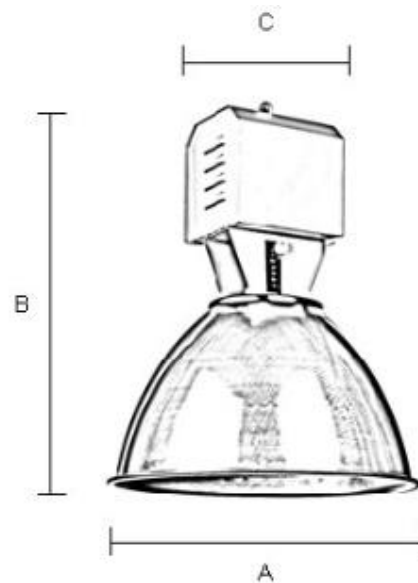

High bay

Cat No	Lamp		Dimensions			
			A	B	C	Weight (kg)
HI150S	1 x 150W SON/E		480	620	290	6.25
HI250M	1 x 250W MBF/U		480	620	290	6.10
HI250MBI	1 x 250W MBI/E		480	620	290	7.85
HI250S	1 x 250W SON/E		480	620	290	7.85
HI400M	1 x 400W MBF/U		480	620	290	7.65
HI400MBI	1 x 400W MBI/E		480	620	290	8.75
HI400S	1 x 400W SON/E		480	620	290	8.75

Accessories

Suffix	Description
HISWG	Protective wire guard
HIGLASS	Toughened glass cover
HIPPD	Polycarbonate diffuser cover
HIPSWG	Wire guard for use in sports applications, can be used with HIGLASS

Note: HIGLASS & HISWG not suitable for use together. HIPSWG with HIGLASS

Options

Suffix	Description
TI	Timer ignitor
CS	Cold store version for operation down to SON - 40°C MBI -25°C MBFU -20°C
DLST	Lamp sensor & timer



TAMLITE LIGHTING TECHNICAL DEPARTMENT
TEL 01952 292441 Fax 01952 292155
e-mail technical@tamlite.co.uk

lighting for
a living